


C A M	TERM. NO.	FUNCTION	CIRCUIT	PREWASH		OFF		REGULAR				OFF		PERMANENT PRESS				OFF		DELICATES/ HAND WASH		OFF		
				HEAVY WASH	QUICK WASH	RINSES & SPINS I	FINAL SPIN	WASH	RINSES & SPINS	FINAL SPIN	WASH	RINSES & SPINS	FINAL SPIN	WASH	RINSES & SPINS	FINAL SPIN								
0/0	2	1	T	DETENT																				
0	5	4	T	MACHINE POWER																				
1	8	7	T	CODE A																				
2	11	10	T	SOLENOID 2																				
3	14	13	T	CODE B																				
4	17	16	T	CODE E																				
5	20	18	B	SOLENOID 1																				
6	23	22	T	CODE C																				
7	11	21	B	CODE D																				
8	14	22	T	TM DIRECT																				
10	17	10	T	WASH WATER-MAIN																				
12	20	12	B	RINSE WATER-MAIN																				
		15	B	RINSE WATER TEMP																				
		16	T	WASH WATER TEMP																				
		18	B	PRESS SW. BYPASS																				
		19	T	BUZZER																				
		21	B	DRAIN PUMP-EX R.																				
		22	T	DRAIN PUMP																				
		24	B																					


STEP NO.	STEP TIME (MIN.)
1	6.67
5	2.97
10	3.00
15	2.00
20	6.67
25	1.00
30	3.00
35	2.97
40	10.00
45	3.00

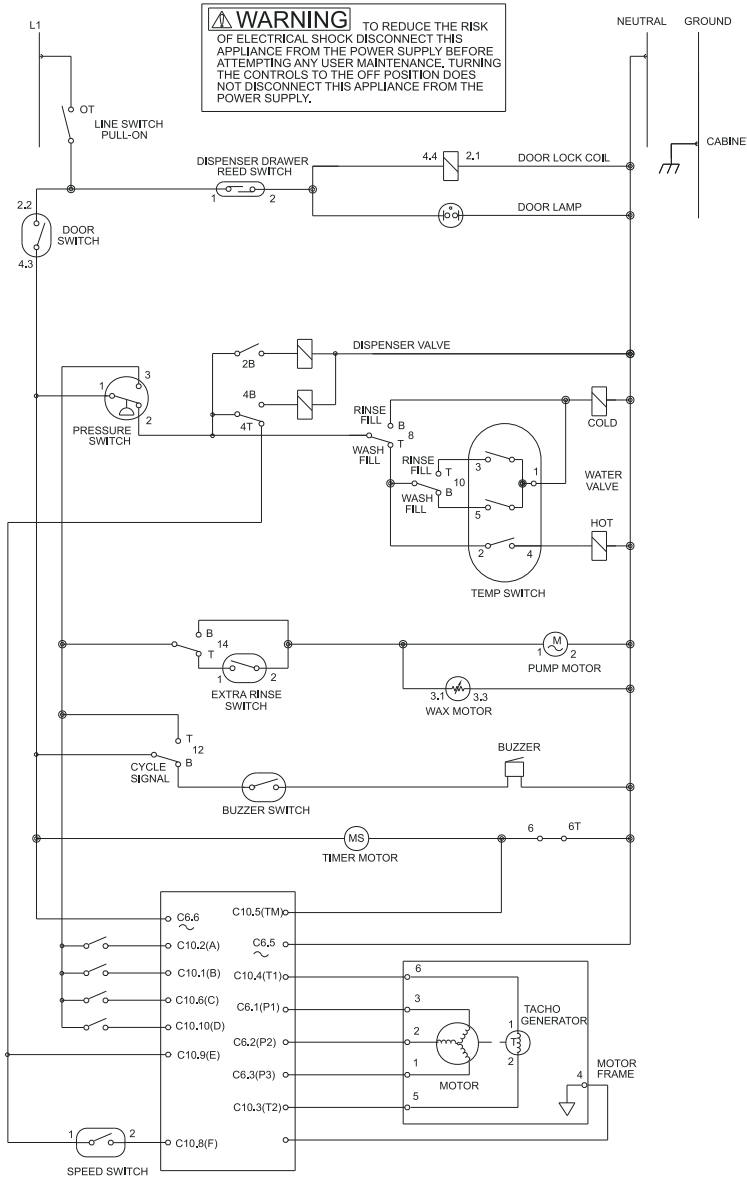

WARNING TO REDUCE THE RISK OF ELECTRICAL SHOCK DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY BEFORE ATTEMPTING ANY USER MAINTENANCE. TURNING THE CONTROLS TO THE OFF POSITION DOES NOT DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY.


ELECTRICAL COMPONENT	RESISTANCE Ω @ 77°F(25 @ 77°C)
WATER VALVE SOLENOIDS	880 ±10%
DOOR LOCK SOLENOID	380 ±10%
TIMER MOTOR	2425 ±6%
PUMP MOTOR	15 ±7%
DISPENSER VALVE SOLENOIDS	1100 ±7%
MOTOR	
M1 TO M2	2.6 ±7%
M2 TO M3	2.6 ±7%
M1 TO M3	2.6 ±7%
M5 TO M6	184 ±7%

⊕	CONNECTION
+	NO CONNECTION
⏏	CABINET GROUND
⏏	LOCAL GROUND



MOTOR PLUG-MALE (END VIEW)

CIRCUIT			
WASH/ RINSE	1-3	1-5	2-4
C/C		X	
W/C		X	X
W/W	X	X	X
H/C			X



TIMER PLUG-MALE (END VIEW)

131 931 100