


L1
R-7

SURFACE ELEMENTS CIRCUIT / CIRCUIT-ELEMENTS-SURFACE

L2 GND
B-7 G-4
N W-10

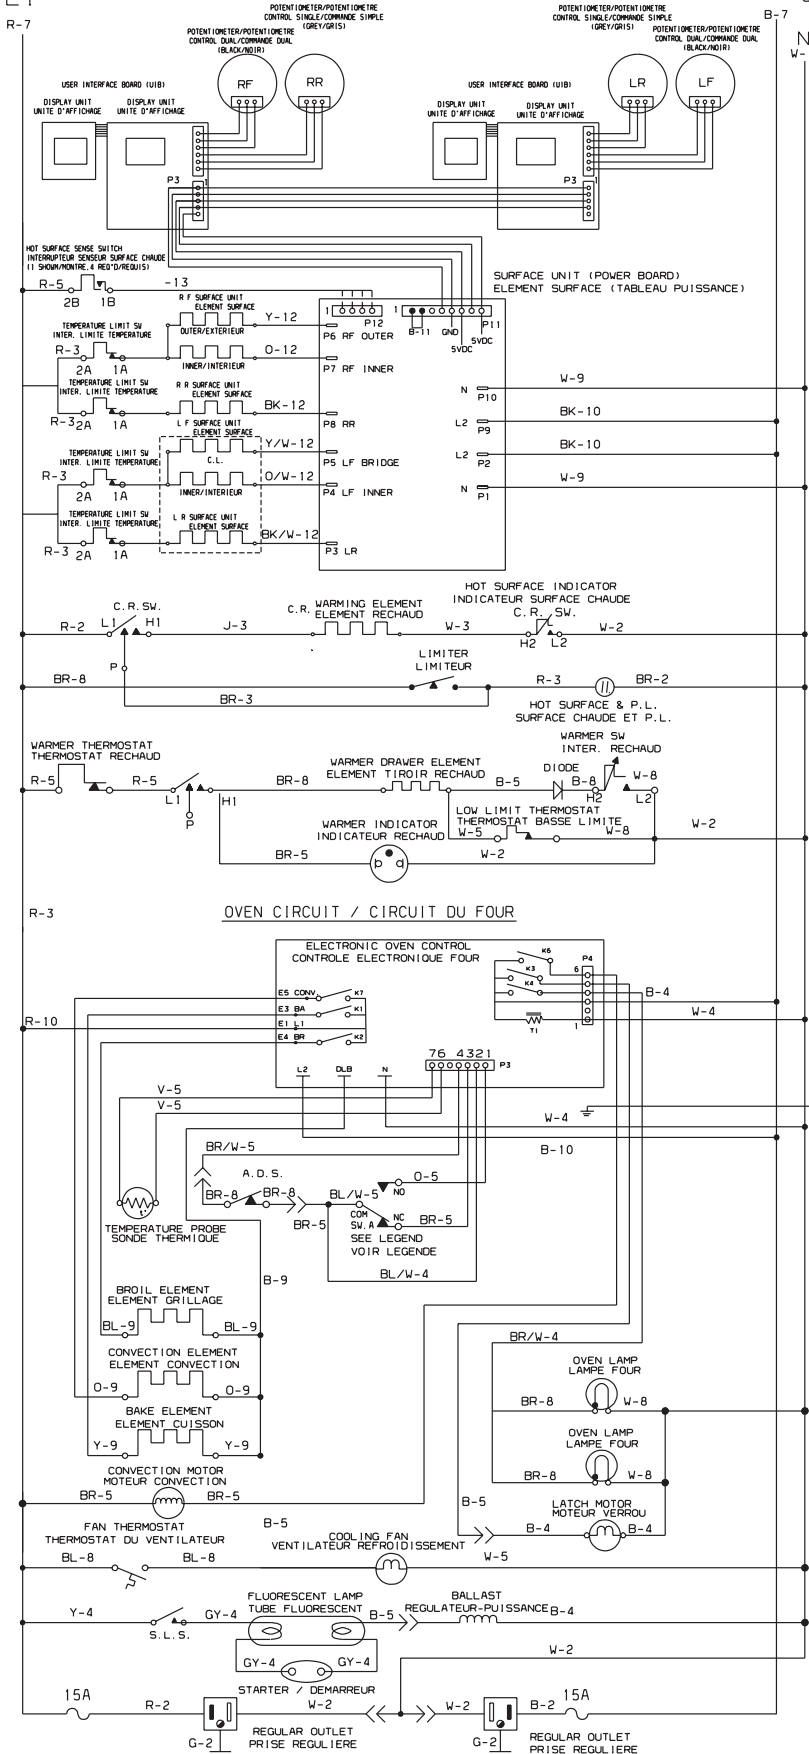

- LEGEND / LEGENDE**
- S.T. - SAFETY THERMOSTAT / THERMOSTAT DE SURETE
 - SW. - SWITCH / COMMUTEUR (INTERRUPTEUR)
 - R.F. - RIGHT FRONT / AVANT DROIT
 - R.R. - RIGHT REAR / ARRIERE DROIT
 - L.F. - LEFT FRONT / AVANT GAUCHE
 - L.R. - LEFT REAR / ARRIERE GAUCHE
 - C.R. - CENTER REAR / ARRIERE CENTRE
 - C.L. - CENTER LEFT / CENTRE GAUCHE
 - P.L. - PILOT LIGHT / LAMPE TEMOIN
 - S.L.S. - SURFACE LAMP SWITCH / INTERRUPTEUR-LAMPE-SURFACE
 - O.L.S. - OVEN LAMP SWITCH / INTERRUPTEUR-LAMPE-FOUR
 - A.D.S. - AUTOMATIC DOOR SWITCH / INTERRUPTEUR AUTOMATIQUE PORTE
 - DLB - DOUBLE LINE BREAK / RELAIS-COUPURE-LIGNE
 - DR LAT MTR - DOOR LATCH MOTOR / MOTEUR VERROU PORTE

COLORS / COULEURS

B- BLACK / NOIR	G- GREEN / VERT
W- WHITE / BLANC	R- RED / ROUGE
O- ORANGE / ORANGE	Y- YELLOW / JAUNE
BR- BROWN / BRUN	BK/W- BLACK/WHITE / NOIR/BLANC
PK- PINK / ROSE	O/W- ORANGE/WHITE / ORANGE/BLANC
V- VIOLET / VIOLET	Y/W- YELLOW/WHITE / JAUNE/BLANC

CODE STYLE



CODE	GAUGE/CAL.	TEMP. °C	CSA	UL
1	10	150	EXL-150	3321
2	16	125	CL1251	3173
3	16	200	SEW-1	3122
4	18	125	CL1251	3173
5	18	150	EXL-150	3321
6	14	125	CL1251	3173
7	12	125	CL1251	3173
8	18	200	SEW-1	3122
9	16	150	EXL-150	3321
10	14	150	EXL-150	3321
11	22	200		10068
12	16	250		3252
13	18	250		3252

UNIT RATING ETALONNAGE DES ELEMENTS

RATED VOLTAGE / TENSION: 240 V.		
OVEN ELEMENTS / ELEMENTS DU FOUR	WATTS	OHMS
BAKE / CUISSON	3400	16.9
BROIL / GRIL	3000	19.2
CONVECTION / CONVECTION	2750	20.8
CONVECTION / CONVECTION	2500	23.0

OVEN TEMPERATURE TEMPERATURE DU FOUR

CLEANING CYCLE / CYCLE DE NETTOYAGE	860°F ±25°F
DOOR LOCK / VERROUILLAGE DE PORTE	550°F ±25°F

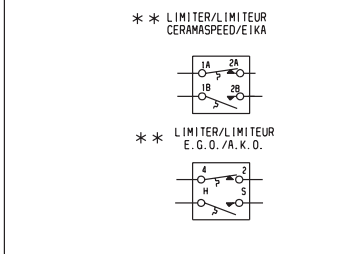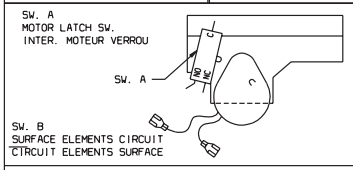

CAUTION: DISCONNECT POWER BEFORE SERVICING UNIT.
ATTENTION: COUPEZ L'ALIMENTATION AVANT D'EFFECTUER LA REPARATION.