


PRODUCT MODEL NUMBER

LEV4634JQ


Electrical: A four-wire or three-wire, single phase, 120/240-volt, 60-Hz, AC-only, electrical supply (or four-wire or three-wire, 120/208-volt if specified on model/serial rating plate) is required on a separate 30-ampere circuit, fused on both sides of the line. A time-delay fuse or circuit breaker is recommended.

Exhaust venting: Exhaust your dryer to the outside. four-inch diameter vent is required. Rigid or flexible metal exhaust vent must be used. Do Not use plastic or metal foil vent. Exhaust outlet hood must be at least 12 inches from the ground or any object that may be in the path of the exhaust.

OVERALL DIMENSIONS

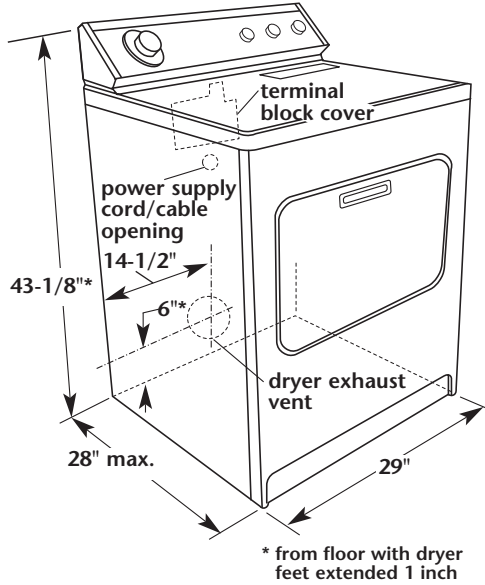

DOOR CLEARANCE DIMENSIONS


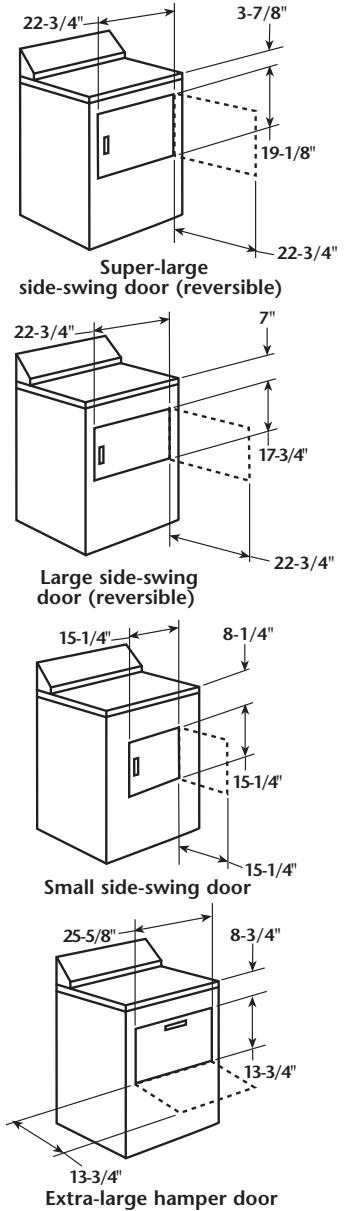


RECESSED AREA AND CLOSET INSTALLATION

| Recommended/Minimum | | | | |
|---------------------|-------|-------|---------|-------|
| Recessed | Back | Sides | Top | Front |
| Exhausted | 5"/0" | 1"/0" | 18"/15" | — |
| Closet | 5"/4" | 1"/0" | 18"/15" | 1"/1" |

Closet confined area

If a closet door is installed: The minimum unobstructed air openings are required. Louvered doors with equivalent air openings are acceptable.

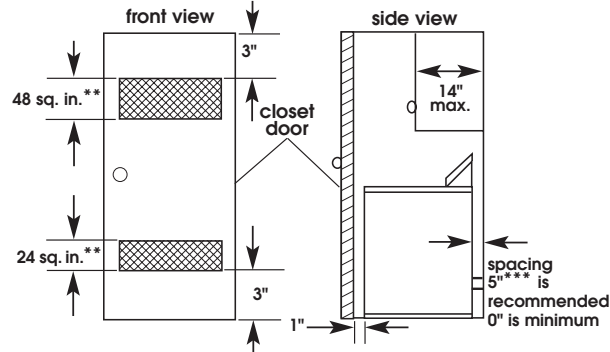

***Wall, door and floor molding may require additional spacing.

** Minimum top and bottom air openings for closet door.
*** External exhaust elbow requires additional space.

EXHAUST VENTING

When you use only one type of metal vent...

- Determine the number of elbows you will need.
- In the column listing the type of metal vent you are using (rigid or flexible), find the maximum length of metal vent on the same line as the number of elbows.

| Maximum length of Rigid metal vent OR fully extended Flexible metal vent | | |
|--|----------------------------|-------------------------------|
| ① Number of 90° elbows | ② 4" dia. rigid metal vent | ③ 4" dia. flexible metal vent |
| 0 | 120 ft | 40 ft |
| 1 | 110 ft | 37 ft |
| 2 | 100 ft | 33 ft |
| 3 | 90 ft | 30 ft |
| 4 | 80 ft | 27 ft |
| 5 | 70 ft | 23 ft |

The maximum length using a 2" x 6" rectangular vent with 2 elbows and transitioning into a 2-1/2" exhaust hood is 8 feet.

When you use a combination of rigid and flexible metal vent...

- Determine the number of elbows you'll need.
- Determine the length of Flexible metal vent you'll use. Find the column that has the nearest number of feet to what you will be using.
- In the shaded area of that column find the maximum length of Rigid metal vent on the same line as the number of elbows.

| ① | ② | Maximum length of fully extended Flexible and Rigid metal vent | | | | | |
|---|--------|--|-------|--------|--------|--------|------------------------------|
| | | Length of Flexible metal vent | | | | | |
| | 0' | 1-5' | 6-10' | 11-15' | 16-20' | 21-25' | |
| 0 | 120 ft | 105 ft | 90 ft | 75 ft | 60 ft | 45 ft | ③ Length of Rigid metal vent |
| 1 | 110 ft | 95 ft | 80 ft | 65 ft | 50 ft | 35 ft | |
| 2 | 100 ft | 85 ft | 70 ft | 55 ft | 40 ft | 25 ft | |
| 3 | 90 ft | 75 ft | 60 ft | 45 ft | 30 ft | 15 ft | |
| 4 | 80 ft | 65 ft | 50 ft | 35 ft | 20 ft | 5 ft | |
| 5 | 70 ft | 55 ft | 40 ft | 25 ft | 10 ft | 0 ft | |

Example:

- You need to use 2 elbows.
- You will use 5 feet Flexible metal vent.
- The maximum length of Rigid metal vent you can use is 85 feet.