





C A M	TERM	CIRCUIT	PREWASH	OFF	REGULAR			OFF	PERMANENT PRESS			OFF	DELICATES/ HAND WASH			
					HEAVY WASH	NORMAL WASH	QUICK WASH		RINSES & SPINS	RINSES & SPINS	RINSES & SPINS		FINAL SPIN	RINSES & SPINS	FINAL SPIN	
0/0	2	DETENT														
0	5	MACHINE POWER														
1	8	CODE A														
2	11	SOLENOID 2														
3	14	CODE B														
4	17	CODE E														
5	20	SOLENOID 1														
6	23	CODE C														
7	11	CODE D														
8	14	WASH WATER-MAN														
10	17	RINSE WATER-MAN														
12	20	WASH WATER TEMP														
14	23	BUZZER														
17	18	WASH WATER TEMP														
20	21	PRESS SW. BYPASS														
22	22	DRAIN PUMP-EX R.														
24	24	DRAIN PUMP														
STEP NO.																
	1															
	5															
	10															
	15															
	20															
	25															
	30															
	35															
	40															
	45															

COMPONENT RESISTANCE TABLE

ELECTRICAL COMPONENT	RESISTANCE Ω ⑦ 77°F(25°C)
WATER VALVE SOLENOIDS	880 ±10%
DOOR LOCK SOLENOID	380 ±10%
TIMER MOTOR	2425 ±6%
PUMP MOTOR	15 ±7%
DISPENSER VALVE SOLENOIDS	1100 ±7%
M1 TO M2	2.6 ±7%
M2 TO M3	2.6 ±7%
M1 TO M3	2.6 ±7%
M5 TO M6	184 ±7%

MOTOR PLUG--MALE
(END VIEW)

TEMPERATURE SWITCH	WASH / RINSE	1-3	1-5	2-4
C/C		X	X	X
W/W		X	X	X
H/C		X	X	X

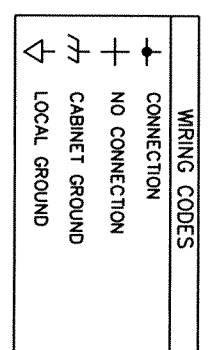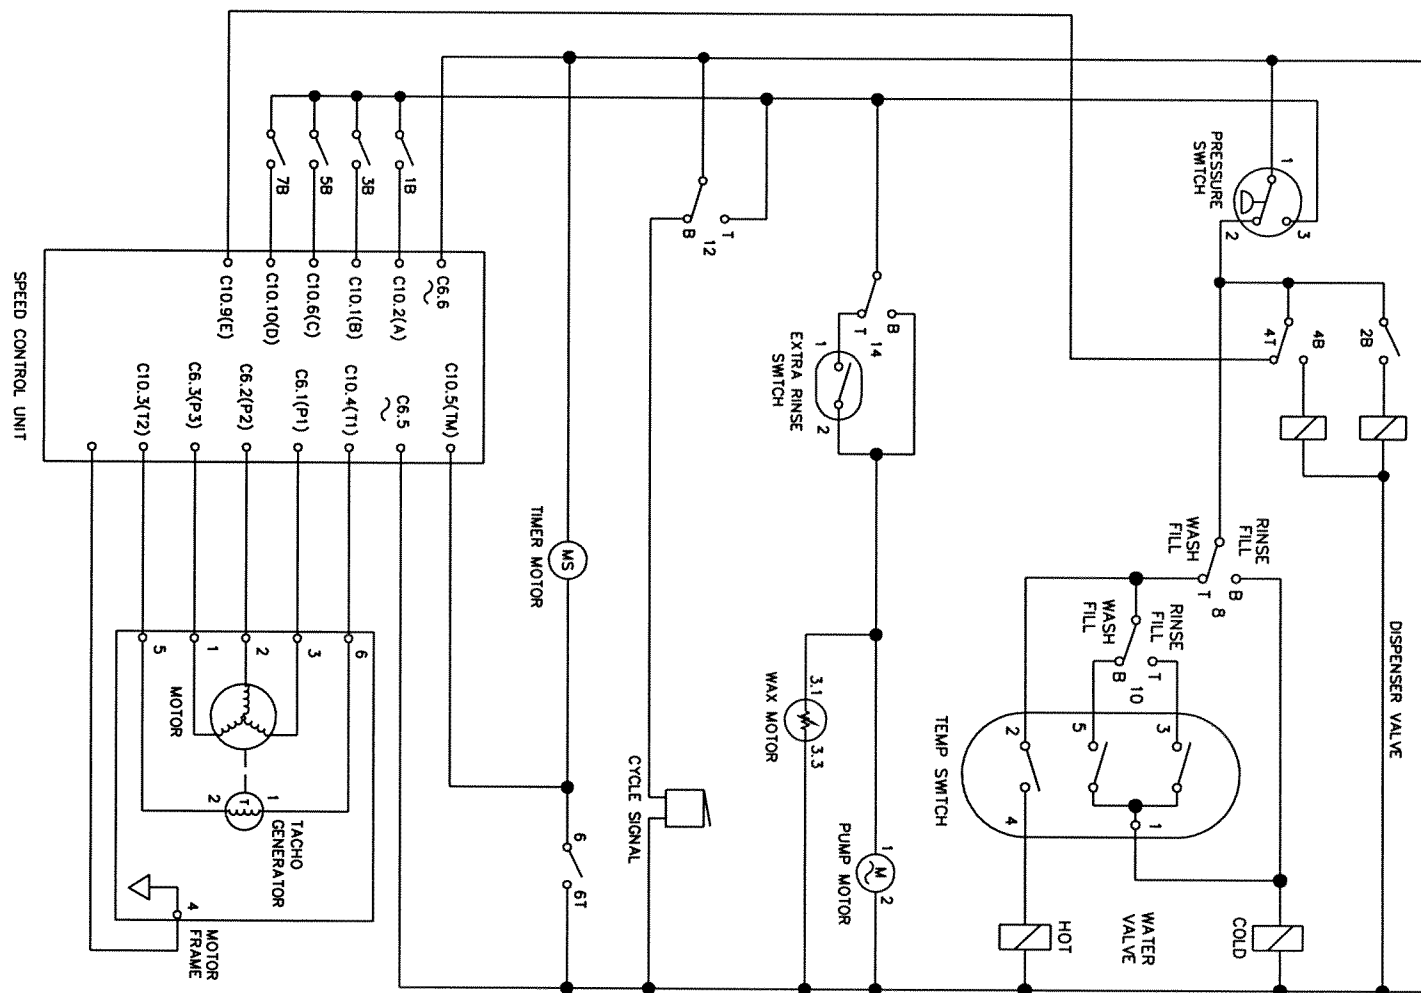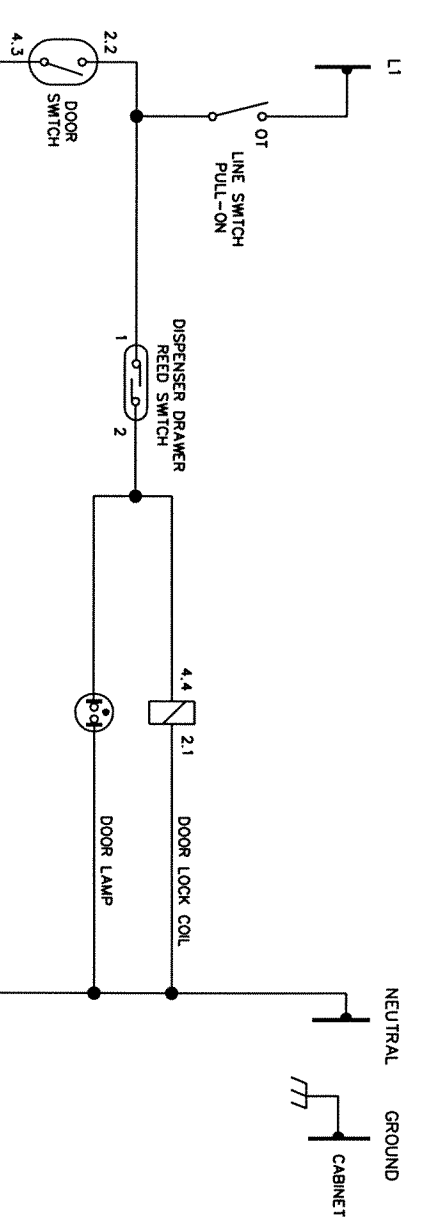

WHITE SIDE

1	h23	24
3	h	21
5	h	18
7	h	15
9	h	11
11	h	11
13	h	11
15	h	11

T C B

BLACK SIDE

0	h	12	11
2	h	16	15
4	h	17	14
6	h	11	10
8	h	15	14
10	h	17	16
12	h	20	19
14	h	24	22

B C T

WARNING TO REDUCE THE RISK OF ELECTRICAL SHOCK DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY BEFORE ATTEMPTING ANY USER MAINTENANCE. TURNING THE CONTROLS TO THE OFF POSITION DOES NOT DISCONNECT THIS APPLIANCE FROM THE POWER SUPPLY.