


46" GAS DROP-IN COOKTOP **E46GC66ESS**

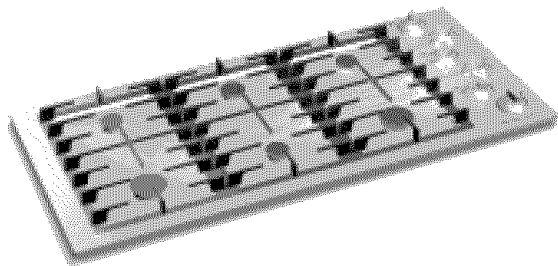

46" Gas Drop-In Cooktop Specifications

- Product Weight – 72 Lbs.
- Voltage Rating – 120V/60 Hz/15 Amp
- Always consult local and/or national electric and gas codes.
- Access to the underside of cooktop and junction box must be provided for inspection and service.
- Cooktop ships with 3/4" factory regulator.
- Allow 30" minimum clearance between top of cooktop and bottom of unprotected wood or metal overhead cabinetry.
- Allow 24" minimum clearance when bottom of wood or metal overhead cabinet is protected by not less than 1/8" flame-retardant millboard covered with not less than No. 28 MGS sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.
- Recommended distance from rear edge of cooktop to nearest vertical combustible surface is 2-1/2" to backsplash or 3-1/8" to rear wall.
- Allow 7-1/2" minimum clearance from edge of cooktop to nearest combustible wall on either side of unit.
- Allow 2-1/2" minimum clearance between bottom of cooktop chassis and all combustible surfaces including upper edge of drawer installed beneath cooktop.
- Beneath cooktop, allow 46" minimum width between cabinet sidewalls.
- A fixed shelf should not be installed beneath cooktop.
- Overhead cabinetry should not exceed a 13" maximum depth.
- To reduce risk of fire when using overhead cabinetry, install range hood that projects horizontally a recommended minimum of 5" beyond bottom of cabinets.

Note: Refer to Product Installation Guide for detailed instructions on the web at www.electroluxusa.com.

Six Burners, Interlocking Grates

Designed for cooking multiple dishes at varying temperatures on a single cooktop. Interlocking grates spread weight over a broad area providing an ultrastable cook surface.

Flush Surface

The smooth, flat stainless steel surface beneath the cooking grates allows for quick and easy cleaning and buffs to a glossy shine.

46" GAS DROP-IN COOKTOP

Configuration 6 Sealed Burners

FEATURES

Formed Stainless Steel Platform	Yes
Large Professional Skirted Knobs with Bezel	6
Sealed Burner – 14,000 BTU	2
Sealed Burner – 12,500 BTU	1
Sealed Burner – 8,500 BTU	3
Simmer Burner – 850 BTU	Yes
Linear Flow Burner Valves	6
Electronic Ignition with Auto Re-ignition	Yes
Interlocking Grates	3

SPECIFICATIONS

Gas Inlet Location	Right Rear
LP Conversion Kit	Included
Voltage Rating	120V/15 Amp
Electrical Cable	Included
Shipping Weight	76 Lbs.

NOTE: Always consult local and / or national electric codes. Refer to Product Installation Guide for detailed installation instructions on the web at www.electroluxusa.com.

