

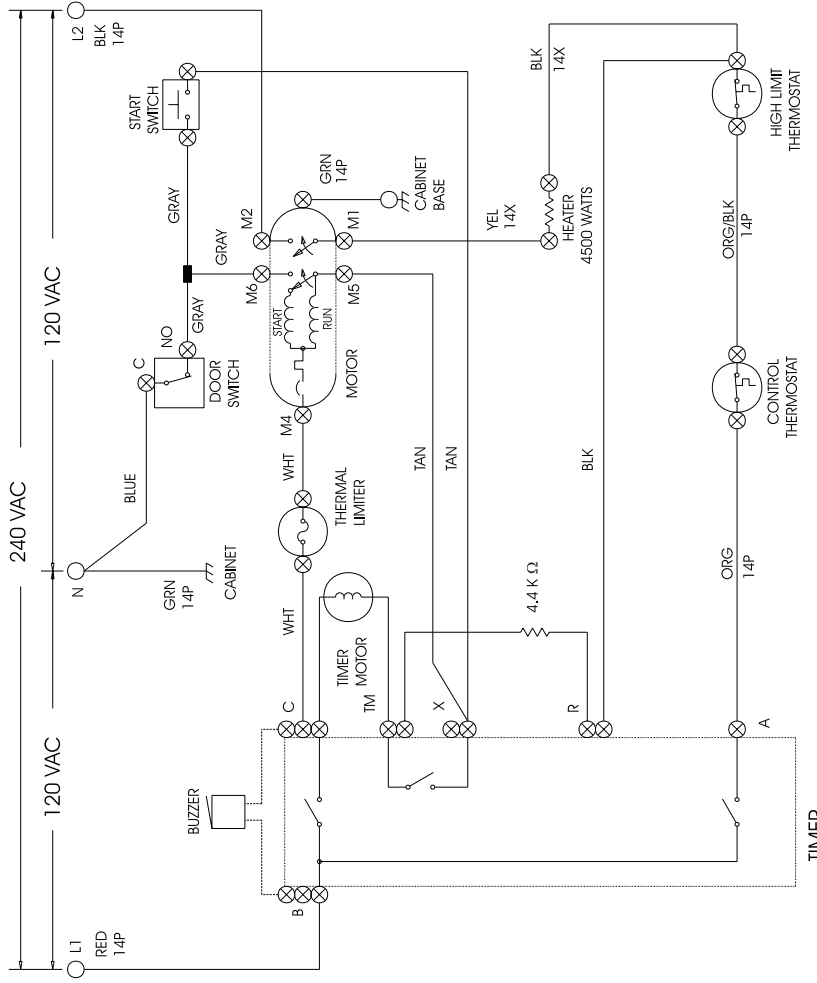


CAUTION: DISCONNECT ELECTRIC CURRENT BEFORE SERVICING

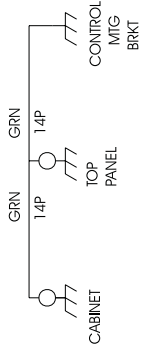

NOTE:
 DASHED LINES INDICATE
 CIRCUITS THAT ARE NOT
 IN ALL MODELS.

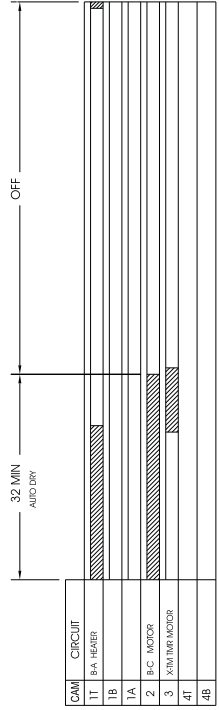

WIRING CODES	
	PLUG-IN TIMER
	QUICK DISCONNECT TERMINAL
	CONNECTION
	NO CONNECTION
	MOTOR SWITCH
	SPLICE
	MOTOR PROTECTOR
	CHASSIS (CABINET) GROUND
	SCREW TERMINAL
	HARNESS CONNECTOR TERMINAL
	INSULATED TERMINAL

WIRE SPECIFICATIONS		
CODE	WIRE GAUGE A.W.G.	INSULATION MATERIAL
18P	18	105°C PVC (POLYVINYLCHLORIDE)
14P	14	
14X	14	125°C X-LINK
NOTE: ALL UNSPECIFIED WIRE CODES ARE 18P.		

- NOTES:
1. ALL WIRING MUST CONFORM TO LOCAL ELECTRICAL CODES.
 2. CONNECT DRYER TO A 30 AMPERE INDIVIDUAL BRANCH CIRCUIT.
 3. TIMER SHOWN IN OFF POSITION, DOOR SWITCH CLOSED, MOTOR AT REST, & THERMOSTAT CLOSED.

BAR CHART TO THE LEFT REPRESENTS ONE COMPLETE REVOLUTION OF TIMER SHAFT.

SHADED PORTION OF BAR CHART INDICATES THE PROPORTIONAL TIMES THAT INTERNAL TIMER CONTACTS ARE CLOSED.

E

WIRING DIAGRAM
 P/N 131870400