


ZMC1095BF/SF/WF—GE Monogram Built-In Microwave/Convection Oven

Dimensions and Specifications (in inches)

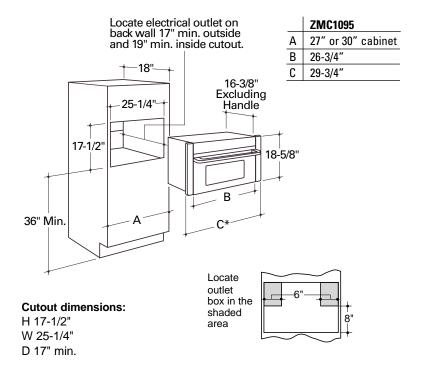

Built-in microwave/convection ovens require a 120 volt, 60Hz power supply. A separate circuit, protected by a time delay fuse or circuit breaker, is required.

Each oven is supplied with a 45" long power cord, for which a properly grounded 3-prong receptacle is required.

Microwave/convection ovens are 800 watts and draw 1450 watts, with a 13 amp load.

Note: Reference GE Monogram Built-In Microwave Oven Installation Instructions, packed with product, for complete details.

Construct Base 27" or 30"" 24"-Min. 3/8" Plywood Supported by 2 x 4 or 1 x 2 17" Min. 25-1/4" Runners, all for Flush Four Sides Outlet 17-1/2" 1-7/8" Min. Per Oven Requirement 45-1/4'


Installation Option shown above includes: ZMC1095 microwave oven installed above a GE Monogram 27" or 30" single wall oven.

For answers to your Monogram,® GE Profile™ or GE appliance questions, visit our website at GEAppliances.com or call GE Answer Center® service, 800.626.2000.





ZMC1095BF/SF/WF—GE Monogram Built-In Microwave/Convection Oven

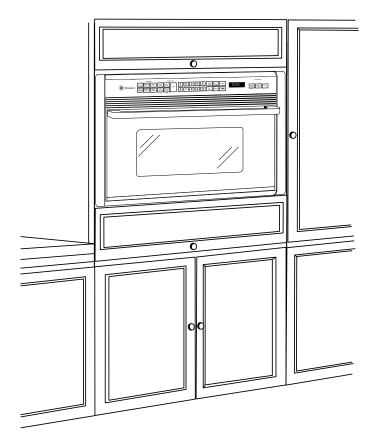

Features and Benefits

- 1.0 cu. ft. Oven Cavity
- 800 Watts*
- Electronic Touch Controls
- Express Cook with Instant-On Controls
- Sensor Cooking Controls for Popcorn, Cook, Reheat and Beverage Pads (Vegetable 1,2,3/ Potato/Fish/Chicken/Meat)
- Convection Cook
- Combination Cook
- Combination Roast (Probe)
- Micro Cook I & II
- Auto Defrost and Time Defrost
- Add 30 Seconds
- Kitchen Timer
- Temp Cook and Hold (Probe)
- Delay Start/Reminder
- 10 Power Levels
- Variable Beeper Volume
- Model ZMC1095WF—White on white
- Model ZMC1095BF—Black on black
- Model ZMC1095SF—Stainless steel

^{*}IEC-705 Test Procedure