

# KitchenAid® Dispensing and Non-Dispensing Built-in Refrigerators

## PRODUCT MODEL NUMBERS

KSSC36FM	KSSO42FM	KSSS36QM
KSSC36QM	KSSO42QM	KSSS42FM
KSSC42FM	KSSO48FM	KSSS42QM
KSSC42QM	KSSO48QM	KSSS48FM
KSSC48FM	KSSP36QM	KSSS48QM
KSSC48QM	KSSP42QM	
KSSO36FM	KSSP48QM	
KSSO36QM	KSSS36FM	


**Electrical:** A 115 Volt, 60 Hz., AC only 15- or 20-amp fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

**Water Supply:** A cold water supply with water pressure between 30 and 120 psi (207 - 827 kPa) is required to operate the water dispenser and ice maker. If you have questions about your water pressure, call a licensed, qualified plumber.

**IMPORTANT:** The pressure of the water supply coming out of a reverse osmosis system going to the water inlet valve of the refrigerator needs to be between 30 and 120 psi (207 - 827 kPa).

If a reverse osmosis water filtration system is connected to your cold water supply, the water pressure to the reverse osmosis system needs to be a minimum of 40 to 60 psi (276 - 414 kPa).


## OVERALL DIMENSIONS

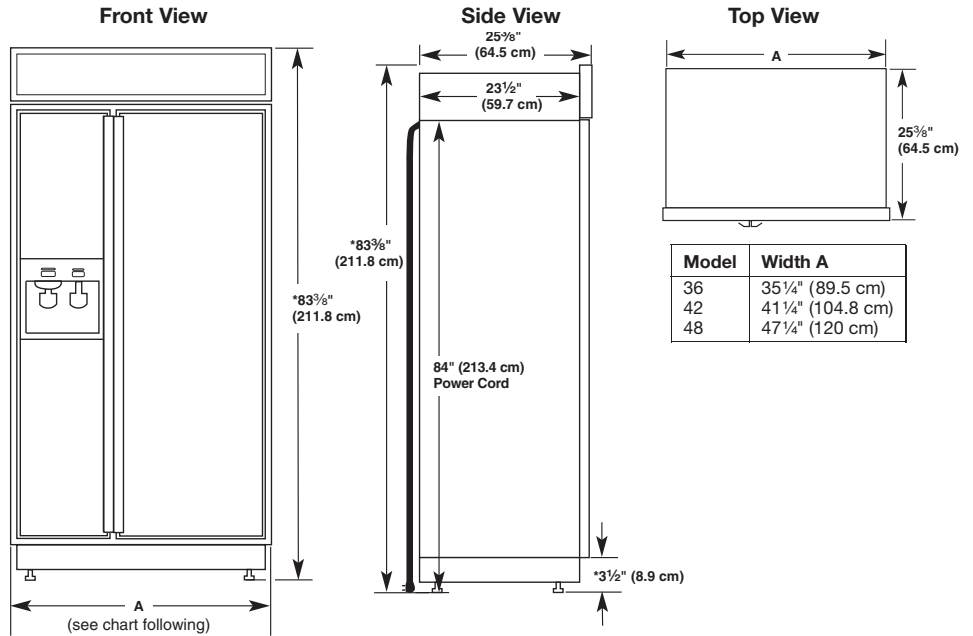


Model	Width A (Trim edge to trim edge)
36	36 1/4" (92.1 cm)
42	42 1/4" (107.3 cm)
48	48 1/4" (122.6 cm)

- The water line attached to the back of the refrigerator is 5 ft (1.5 m) long.
  - Height dimensions are shown with leveling legs extended 1/8" (3 mm) below the rollers.
- \*When leveling legs are fully extended to 1 1/4" (3.2 cm) below rollers, add 1 1/8" (2.9 cm) to the height dimensions.

## DOOR SWING DIMENSIONS

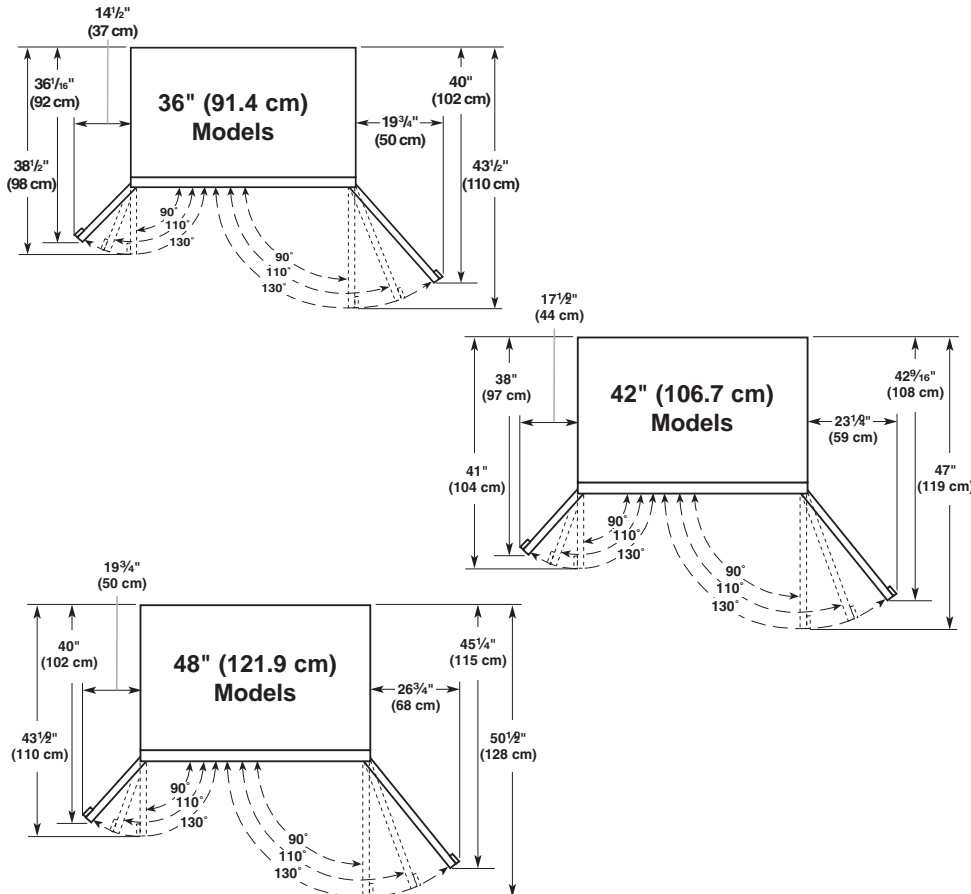

## CABINET OPENING DIMENSIONS

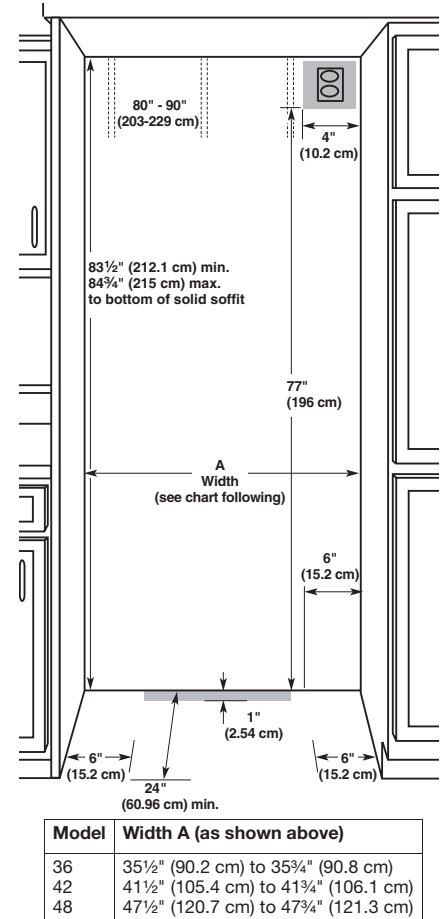

Model	Width A (as shown above)
36	35 1/2" (90.2 cm) to 35 3/4" (90.8 cm)
42	41 1/2" (105.4 cm) to 41 3/4" (106.1 cm)
48	47 1/2" (120.7 cm) to 47 3/4" (121.3 cm)