CAUTION: DISCONNECT ELECTRIC CURRENT BEFORE SERVICING

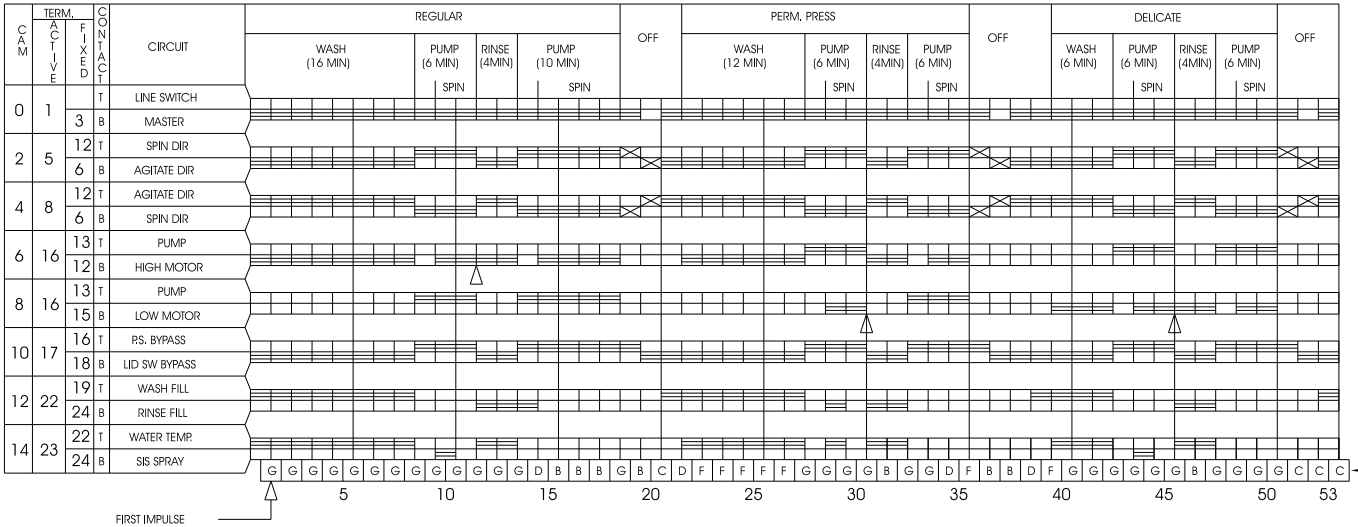

CIRCLED NUMBERS INDICATE CAM

SUBINTERVAL SPRAY DETAIL



SPRAY TO OCCUR DURING THE INDICATED INTERVAL

△ INDICATES SWITCH OPEN FOR 9±4 SEC.

RACHET ANGLE LEGEND

A = 4.5°
B = 5.0°
C = 5.5°
D = 6.0°
E = 6.5°
F = 7.0°
G = 7.5°

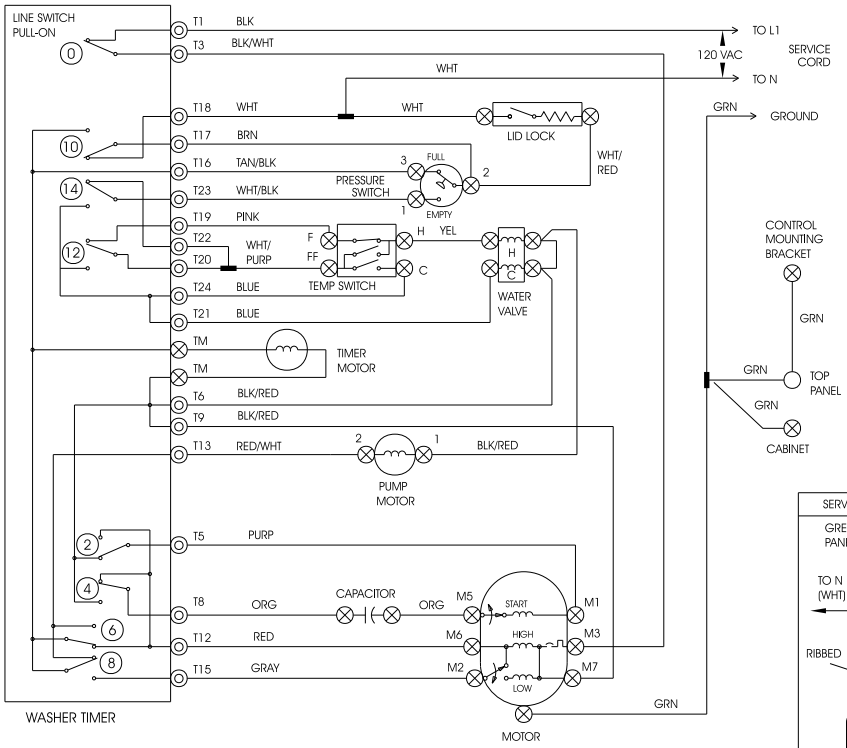



TIMER PLUG-MALE (END VIEW)



WIRING CODES	
◎	PLUG-IN TIMER TERMINAL
⊗	QUICK DISCONNECT TERMINAL
○	SCREW TERMINAL
┼	CONNECTION
┼	NO CONNECTION
	MOTOR SWITCH
	SPLICE
	MOTOR PROTECTOR

TEMPERATURE SWITCH CIRCUIT			
WASH/RINSE	F-H	FF-H	FF-C
HOT/COLD	X	O	O
WARM/COLD	X	O	X
COLD/COLD	O	O	X
WARM/WARM(OPT)	O	X	X

0=OPEN X=CLOSED
(OPT)=OPTIONAL ON SOME MODELS

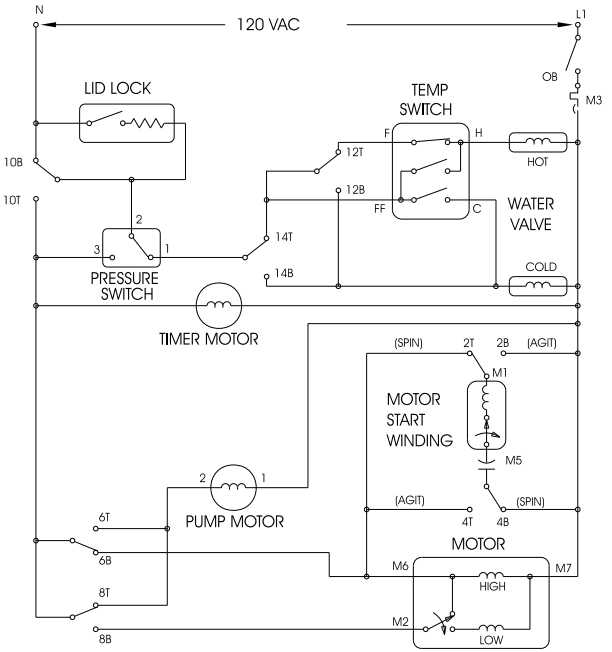

NOTE: SUFFIX INDICATES TIMER SWITCH CONTACTS
T=TOP
B=BOTTOM

WIRING DIAGRAM
P/N 131822100