



# Freestanding Gas Range


## PRODUCT MODEL NUMBERS

SF3010E  
SF5140E

**Gas supply:** Use 3/4" rigid pipe gas supply line to the range location. A smaller size pipe on long runs may result in insufficient gas supply. With L.P. gas, piping or tubing size can be 1/2" minimum. If local codes permit, it is recommended that new flexible metal tubing, design-certified by AGA or CSA, 1/2-inch or 3/4-inch I.D., be used for connecting the range to the rigid gas supply line. A 1/2" male pipe thread is needed for connection to pressure regulator female pipe threads. An individual manual shutoff valve must be located in the same room, but external to the range.


**Electrical:** A 120-volt, 60-Hz, AC-only, 10-ampere, electrical supply fused on both sides of the line. A separate circuit is recommended. A time-delay fuse or circuit breaker is recommended.

## OVERALL DIMENSIONS

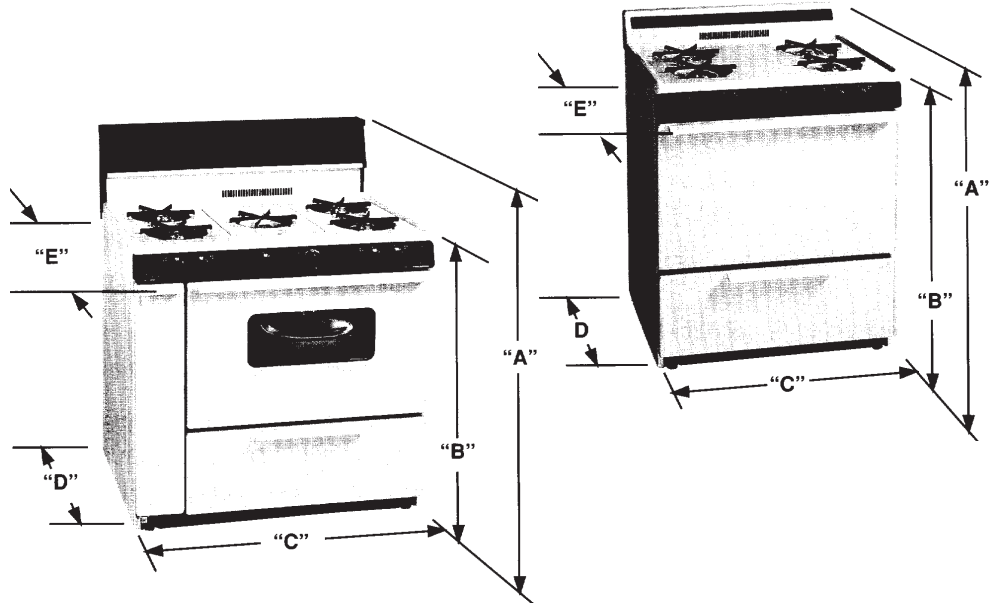

MODEL	OVERALL HEIGHT DIM. "A"	COOKTOP HEIGHT DIM. "B"	WIDTH DIM. "C"	DEPTH WITHOUT HANDLE DIM. "D"	DEPTH WITH HANDLE DIM. "E"
36" GAS	46"	36"	36	26"	27 1/8"
30" GAS	40"	36"	30"	26"	27 1/8"
20" GAS	40"	36 1/4"	20 3/16"	24 1/2"	25 1/2"

## CABINET OPENING DIMENSIONS

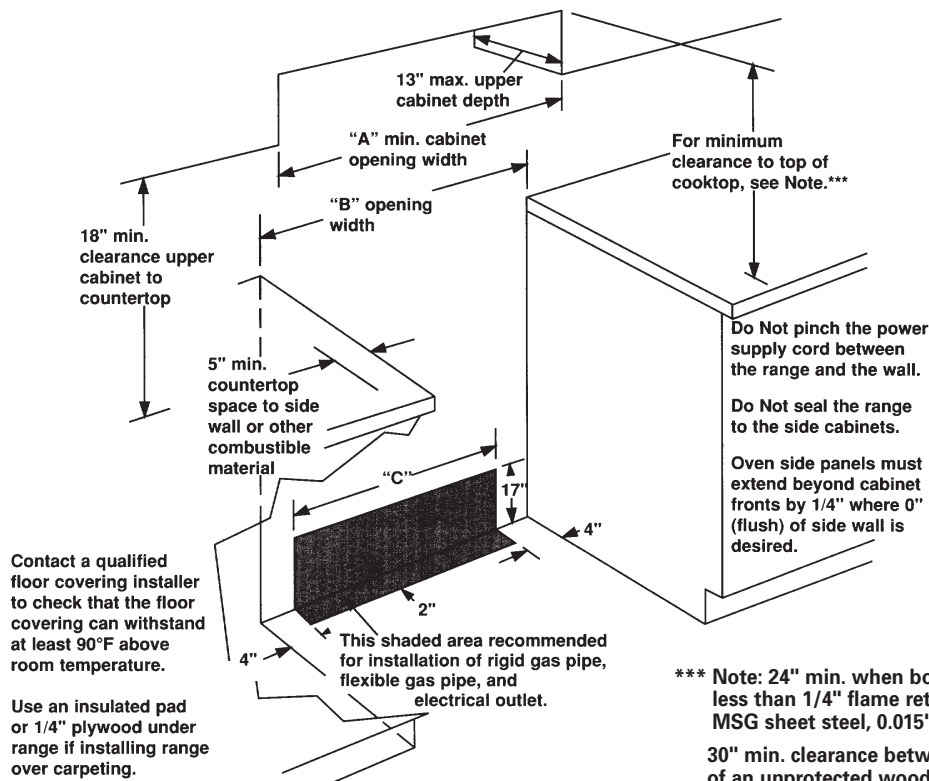

MODEL	DIM. "A"	DIM. "B"	DIM. "C"
36"	36"	36 3/16"	28 3/16"
30"	30"	30 3/16"	22 3/16"
20"	20"	20 1/4"	12 1/4"

\*\*\* Note: 24" min. when bottom of wood or metal cabinet is protected by not less than 1/4" flame retardant millboard covered with not less than No. 28 MSG sheet steel, 0.015" stainless steel, 0.024" aluminum or 0.020" copper.  
30" min. clearance between the top of the cooking platform and the bottom of an unprotected wood or metal cabinet.