



Refrigerator


PRODUCT MODEL NUMBERS

TT14DKXX	TT18DKXR
TT14DKXR	TT18SKXR
TT16DKXR	TT18TKRM
TT16TKXX	TT18TKRP
TT16TKXP	TT18TKXP

Electrical: A 115 Volt, 60 Hz., AC only 15 or 20 ampere fused, grounded electrical supply is required. It is recommended that a separate circuit serving only your refrigerator be provided. Use an outlet that cannot be turned off by a switch. Do not use an extension cord.

Water: Connect the ice maker to a cold water line with water pressure between 30 and 120 psi.


OVERALL DIMENSIONS

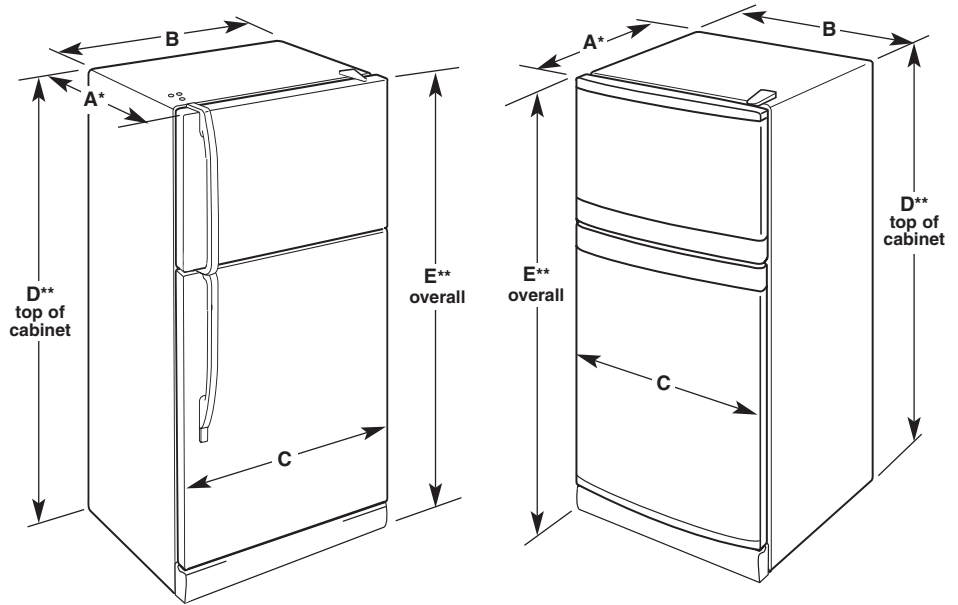

*overall, to back of coils, not including handle
 **includes rollers extended 3/4"

Model	Depth "A"	Cab. Width "B"	Door Width "C"	Cab. Height "D"	Overall Height "E"
STANDARD MODELS					
14 cu.ft.	29 3/4"	28"	28"	62 1/8"	62 3/4"
16 cu.ft.	31 1/8"	28"	28"	65 1/4"	65 3/4"
18 cu.ft.	31 1/8"	28"	28"	67 3/8"	67 7/8"
INTEGRATED MODEL					
18 cu.ft.	31"	28"	28 1/8"	67 3/8"	68"

LOCATION REQUIREMENTS

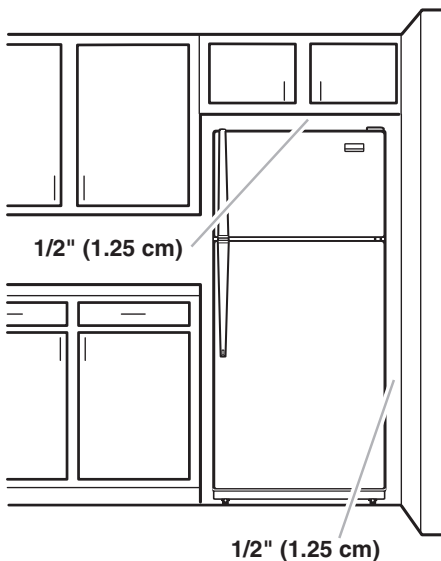

To ensure proper ventilation for your refrigerator, allow for a .5 in. (1.25 cm) space on each side (between base board trim if used).

Allow 3 in. (7.5 cm) of space between overhead cabinets and refrigerator top.

Allow at least 1 in. (2.5 cm) between back of cabinet and the wall.

If your refrigerator has an ice maker, make sure you leave some extra space at the back for the water line connections.

If you are installing your refrigerator next to a fixed wall, leave 2 in. (5.08 cm) minimum on the hinge side (depending on your model) to allow for the door to swing open.

NOTE: Do not install the refrigerator near an oven, radiator, or other heat source, nor in a location where the temperature will fall below 40°F (5°C).